


# Make HandL UTM Grabber compatible with Borlabs

First create a custom group under Marketing

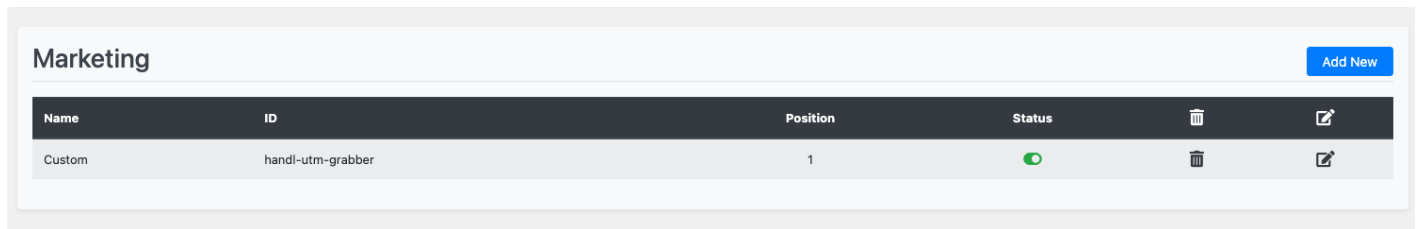

Add following entries under Cookie Name section

```
utm_*, handl_*,first_*,organic_source*,gaclientid,user_agent,handlID
```

**Cookie Information**

Name: Custom

Provider: handl-utm-grabber

Purpose:

Privacy Policy URL:

Host(s):

Cookie Name: utm\_\*, handl\_\*,first\_\*,organic\_source\*,gaclientid,user\_agent,handlID

Block Cookies before Consent: ☐ OFF

Cookie Expiry:

[Save all settings](#) [Go back without saving](#)

**Tips**

**Cookie Information**

The information stored here has no technical effects and serves exclusively to inform the visitor, unless you activate **Block Cookies before Consent**.

The information of the **Services** provided by us may not be complete and should be checked before use.

**What is a Host?**

The host is a part of a URL, often the domain. For example, if the URL is <https://www.example.com/index.html> the host would be [www.example.com](https://www.example.com).

**Block Cookies before Consent**

If you activate this option Borlabs Cookie searches and deletes cookies that match the **Cookie Name**. You can also use \* to search for multiple names, e.g. if you enter the Name **example\_\*** Borlabs Cookie will search and delete the cookies **example\_abc** and **example\_xyz**. Separate multiple cookie names with a comma.

This function is mainly intended to delete session cookies set by third-party plugins via PHP. JavaScript cookies can also be deleted, but only if they belong to the same domain.

Example: if the website runs under [www.example.com](https://www.example.com), no cookie created for [example.com](https://www.example.com) can be deleted.

Named cookies will be only set after consent by the visitor was given and the website was reloaded.

This will block all the HandL UTM Grabber cookies before proper consent given

Revision #2

Created Thu, Nov 11, 2021 1:12 AM by [Leman](#)

Updated Thu, Nov 11, 2021 1:16 AM by [Leman](#)