

Cal.com Integration

HandL UTM Grabber / Tracker How to collect and track UTM variables via Cal.com step by step

- [Track UTMs in Cal.com](#)

Track UTMs in Cal.com


It's quite straightforward to track UTMs in Cal.com, but it does require some JavaScript knowledge. Now, let's get started.

Adding Hidden Fields to Your Form

Firstly, insert some hidden fields into your form under the "Advanced" section.

In this tutorial, we've included `utm_campaign`, `utm_source`, `utm_medium`, `traffic_source`, and `handl_url`. You can further expand this by using the names exactly as they appear from this link:

[Native WP Shortcodes](#)

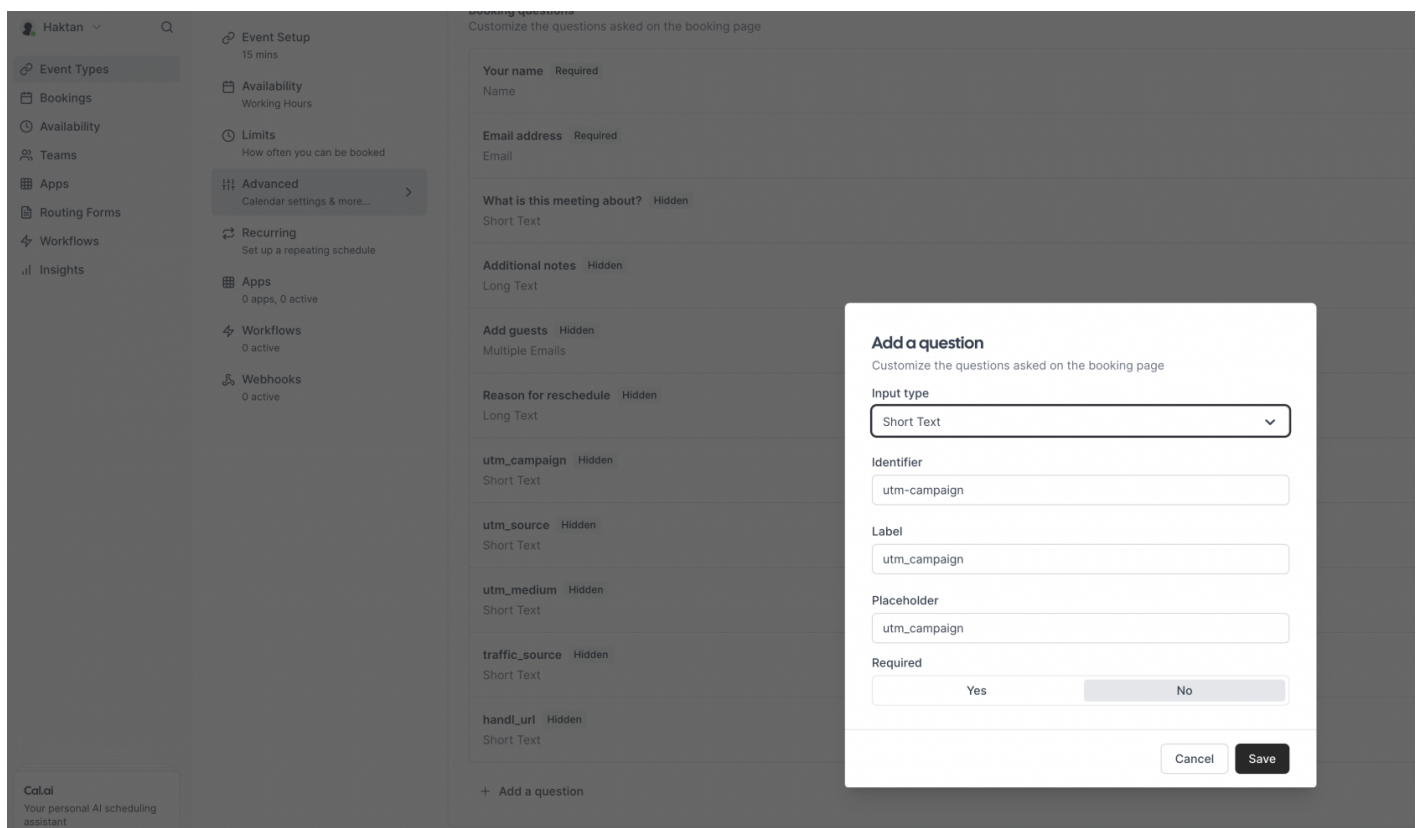

The screenshot displays the Cal.com 'Event Setup' interface. On the left, a sidebar lists various settings: Event Types, Bookings, Availability, Limits, Teams, Apps, Routing Forms, Workflows, and Insights. The 'Advanced' section is selected, showing a list of hidden fields: `utm_campaign`, `utm_source`, `utm_medium`, `traffic_source`, and `handl_url`. A modal titled 'Add a question' is open, allowing the user to customize the questions asked on the booking page. The modal includes fields for 'Input type' (set to 'Short Text'), 'Identifier' (set to 'utm-campaign'), 'Label' (set to 'utm_campaign'), 'Placeholder' (set to 'utm_campaign'), and 'Required' (set to 'No'). The 'Save' button is highlighted.

Ensure the Fields Are Hidden

Make sure that the fields are hidden by toggling off, as depicted in the following image.

Event Setup
15 mins

Availability
Working Hours

Limits
How often you can be booked

Advanced
Calendar settings & more... >

Recurring
Set up a repeating schedule

Apps
0 apps, 0 active

Workflows
0 active

Webhooks
0 active

You can manage this for all your event types in Settings → [Appearance](#) or [Override](#) for this event only.

Booking questions

Customize the questions asked on the booking page

Your name Required		Edit
Name		
Email address Required		Edit
Email		
What is this meeting about? Hidden	<input type="checkbox"/>	Edit
Short Text		
Additional notes Hidden	<input type="checkbox"/>	Edit
Long Text		
Add guests Hidden	<input type="checkbox"/>	Edit
Multiple Emails		
Reason for reschedule Hidden	<input type="checkbox"/>	Edit
Long Text		
utm_campaign Hidden	<input type="checkbox"/>	Edit
Short Text		
utm_source Hidden	<input type="checkbox"/>	Edit
Short Text		
utm_medium Hidden	<input type="checkbox"/>	Edit
Short Text		
traffic_source Hidden	<input type="checkbox"/>	Edit
Short Text		
handl_url Hidden	<input type="checkbox"/>	Edit
Short Text		

+ Add a question

Alter the Embed Code

The original code appears as follows...

```
<!-- Cal inline embed code begins --><div style="width:100%;height:100%;overflow:scroll"
id="my-cal-inline"></div>
<script type="text/javascript"> (function (C, A, L) { let p = function (a, ar) {
a.q.push(ar); }); let d = C.document; C.Cal = C.Cal || function () { let cal = C.Cal; let ar =
arguments; if (!cal.loaded) { cal.ns = {}; cal.q = cal.q || [];
d.head.appendChild(d.createElement("script")).src = A; cal.loaded = true; } if (ar[0] === L)
```

```

{ const api = function () { p(api, arguments); }; const namespace = ar[1]; api.q = api.q ||
[]; typeof namespace === "string" ? (cal.ns[namespace] = api) && p(api, ar) : p(cal, ar);
return; } p(cal, ar); }; })(window, "https://app.cal.com/embed/embed.js", "init");Cal("init",
"15min", {origin:"https://cal.com"});

  Cal.ns["15min"]("inline", {
    elementOrSelector:"#my-cal-inline",
    calLink: "haktansuren/15min",
    layout: "month_view"
  });

  Cal.ns["15min"]("ui",
{"styles":{"branding":{"brandColor":"#000000"},"hideEventTypeDetails":false,"layout":"month_vi
</script>

<!-- Cal inline embed code ends -->

```

We will revise it as follows: There was no configuration object in the JavaScript; we have now added it.

```

config: {
  "utm-campaign": Cookies.get("utm_campaign"),
  "utm-medium": Cookies.get("utm_medium"),
  "utm-source": Cookies.get("utm_source"),
  "traffic-source": Cookies.get("traffic_source"),
  "handl-url": Cookies.get("handl_url")
}

```

Insert it right after the layout line. So, the final code will look like this:

```

<!-- Cal inline embed code begins --><div style="width:100%;height:100%;overflow:scroll"
id="my-cal-inline"></div>
<script type="text/javascript">(function (C, A, L) { let p = function (a, ar) { a.q.push(ar);
}; let d = C.document; C.Cal = C.Cal || function () { let cal = C.Cal; let ar = arguments; if
(!cal.loaded) { cal.ns = {}; cal.q = cal.q || [];
d.head.appendChild(d.createElement("script")).src = A; cal.loaded = true; } if (ar[0] === L)
{ const api = function () { p(api, arguments); }; const namespace = ar[1]; api.q = api.q ||
[]; typeof namespace === "string" ? (cal.ns[namespace] = api) && p(api, ar) : p(cal, ar);
return; } p(cal, ar); }; })(window, "https://app.cal.com/embed/embed.js", "init");Cal("init",
"15min", {origin:"https://cal.com"});
Cal.ns["15min"]("inline", {
  elementOrSelector:"#my-cal-inline",

```

```

calLink: "haktansuren/15min",
layout: "month_view",
config: {
  "utm-campaign": Cookies.get("utm_campaign"),
  "utm-medium": Cookies.get("utm_medium"),
    "utm-source": Cookies.get("utm_source"),      "traffic-source":
Cookies.get("traffic_source"),
    "handl-url": Cookies.get("handl_url")
  }
});
Cal.ns["15min"]("ui",
{"styles":{"branding":{"brandColor":"#000000"},"hideEventTypeDetails":false,"layout":"month_vi
</script>
<!-- Cal inline embed code ends -->

```

After that, test it and voila! You will have all the UTMs in your booking as shown below.



This meeting is scheduled

We sent an email with a calendar invitation with the details to everyone.

What	15 Min Meeting between Haktan and haktansuren
When	Tuesday, January 23, 2024 9:45 AM - 10:00 AM (Central Standard Time)
Who	Haktan Host haktan@handldigital.com haktansuren haktan@handldigital.com
Where	Cal Video ↗

handl_url
<https://handl-sandbox/blog/2024/01/22/cal-com/>

utm_medium
cpc

utm_source
Google

utm_campaign
SpringSale

traffic_source
Paid

Need to make a change? [Reschedule](#) or [Cancel](#)

Add to calendar

